

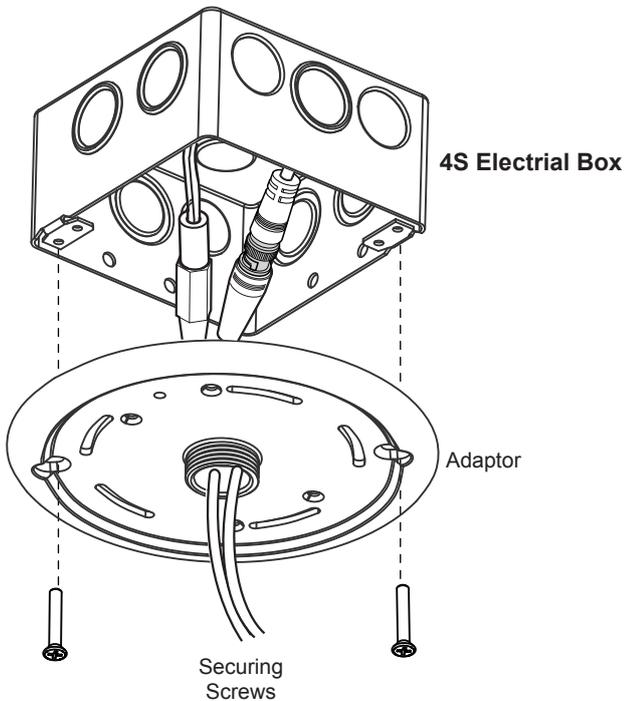


1

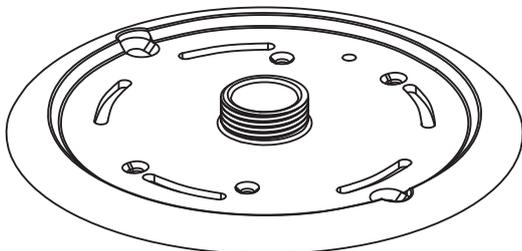

2

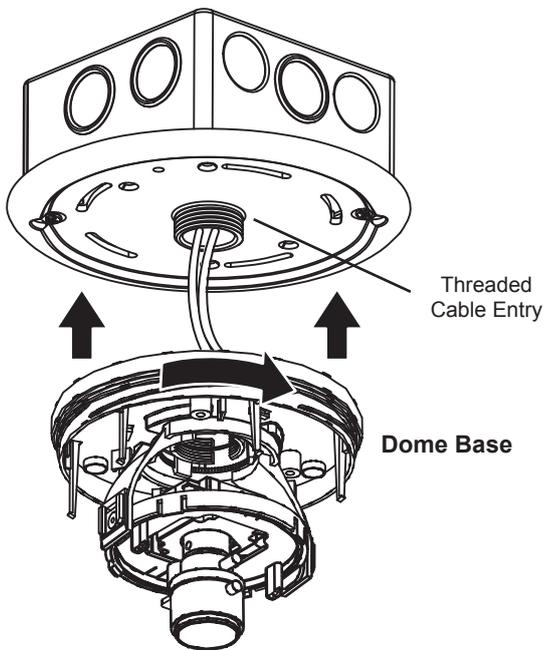


Precautions

To prevent damage to your dome camera or injury to yourself or to others, read and comply with the safety precautions in the enclosure installation and camera sheet before installation and use.

To Install the Electrical Box Adaptor

1. **Remove the Dome Cover**
2. **Pass the Cables through the Cable Entry of the Adaptor**
Carefully pass the cables through the cable entry of the adaptor.
3. **Install the Adaptor onto Box**
Use the proper securing screw holes (see page overleaf) on Adaptor and install on electrical box. Screw the adaptor onto electrical box.
4. **Connecting the Cables**
Connect the video and power cables (as shown in image 3). Limit your cable length so as to put the connectors into the box. Arrange and put the cables, with connectors properly connected, into the electrical box (see image 1).

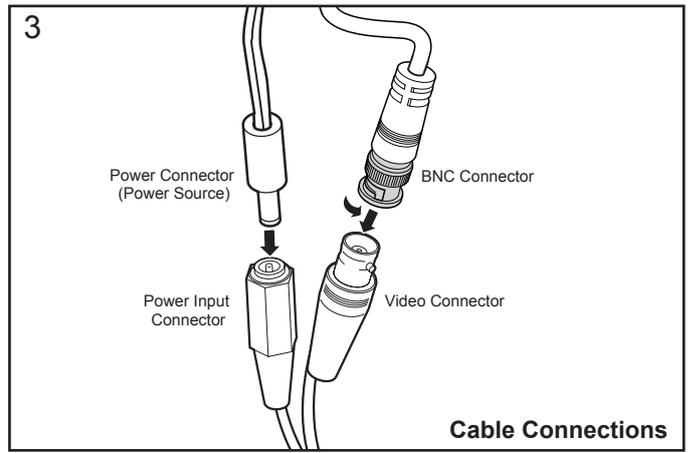

5. **Fit the Dome Base onto the Adaptor**
Fit the dome base onto the threaded cable entry of the adaptor. Rotate the dome base clockwise then tighten the dome base (image 2).
6. **Adjust the Camera Position and Test**
Adjust the camera to the required position and test. See detail instructions in enclosure and camera installation sheet.
7. **Install the Camera Liner and Dome Cover**
Carefully fit the camera liner on the camera module. Install and secure the dome cover with the supplied screws.

Packing List

In addition to this installation sheet, your package should contain:

- Electrical Box Adaptor x1
- Screw Pack x 1

Specifications

- Material : ABS
- Weight : 1.97 oz (55.9 g)
- Dimensions : Ø: 6.02 inch (153 mm)
H: 0.55 inch (14 mm)



Please visit our web site for additional information:
www.deview.com

Product specifications subject to change without notice. Certain product names mentioned herein may be trade names and/or registered trademarks of other companies.

Match the Adaptor mounting locations

Select the proper securing holes to match your electrical box selection.

A~A: 4S Electrical Box

B~B: Double Gang Box

C~C: Single Gang Box

